



SEQUENCE VALVES WITH PRIMARY PRESSURE COMPENSATION			
Code Number	Type	Max. Flow L/min	Max. Pressure Bar
V0642	VSQAPP 3/8"	35	350
V0662	VSQAPP 1/2"	70	350
V0667	VSQAPP 3/4"	110	400



Note: Standard pressure setting range is 30-180 bar. (Set to 90 bar.) Please contact us for other options.
For 3/4" standard pressure setting range is 50-400 bar. (Set to 180 bar.) Please contact us for other options.

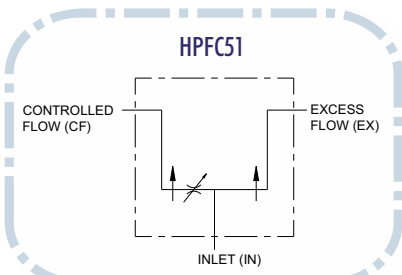

PRESSURE COMPENSATING VARIABLE FLOW CONTROL VALVE		
Code Number	Ports	Max. Flow L/min
HPFCR51	1/2" NPT	60

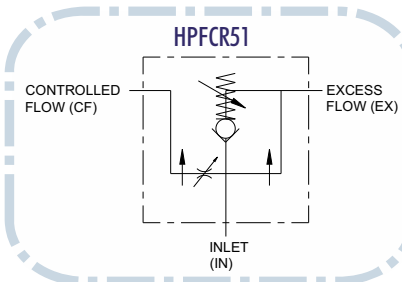

ORDERING CODE

HPFC

Relief valve

Omit = No relief
R = Adj. ball spring relief (110 bar)

Type

51 = Standard flow control

Port size

3/8 = 3/8" NPT (30 L/min)
1/2 = 1/2" NPT (60 L/min)
3/4 = 3/4" NPT (114 L/min)
6 = 9/16-18 UNF (30 L/min)
8 = 3/4-16 UMF (30 L/min)
10 = 7/8-14 UNF (60 L/min)
12 = 11/16-12 UMF (114 L/min)

Flow setting
30 = 0-30 L/min
60 = 0-60 L/min
114 = 0-114 L/min

Ports
2P = With two ports
Omit = With 3 ports

Ordering example: HPFC R 51 1/2 60